



Movable 90°+90° on bracket with block.

Aqua Pro IP 66

Aqua Pro IP66, is a complete range of outdoor floodlights specifically designed to meet the different illumination requirements of large areas and lighting effects. It can be fitted with different super pure aluminium reflectors. Symmetrical, Spot and Flood reflectors.

All reflectors are specifically engineered to match the characteristics of the lamps used and guarantee maximum performance.

Special attention was paid to the selection of materials and to have easy and safe maintenance through the hinged opening to access the lamp and the disconnect switch which automatically cuts off voltage supply when accessing the lamp to fully prevent contact hazard, even accidental, with live parts.





Aqua Pro

G12 - 70 W

IP66

CE ▽ □



Movable 90°+90° on bracket with block.



DARK-LIGHT ATTACHMENT (ON REQUEST)


- DIE-CAST ALUMINIUM BODY, FRAME AND BRACKET
- STAINLESS STEEL SCREWS
- POLYESTER POWDER PAINTING CORROSION AND SALINE FOG RESISTANT
- THERMAL-SAFETY SHOCK RESISTANT GLASS
- DOUBLE INSULATION AND AUTOMATIC SWITCH-OFF WHEN OPENING
- 2 X M20 CABLE GLAND
- EN-60598-1 AND EN-60598-2-5 STANDARDS
- SILICONE GASKET
- 4 YEARS WARRANTY
- IK 07 RATING
- WIND SURFACE EXPOSURE 0.12 M2

Colours:

■ TEXTUR

□ MATT WHITE (on request)

■ MATT-BLACK

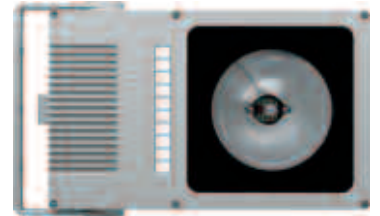


Small areas


Lighting effects

Lighting accents


Weight 6.3 Kg



SPOT 10°




SUPERSPOT 4° (ON REQUEST)

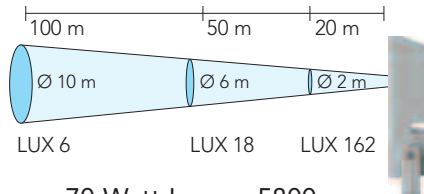

70 Watt Lumen 5800

Eulumdat and photometry available on request

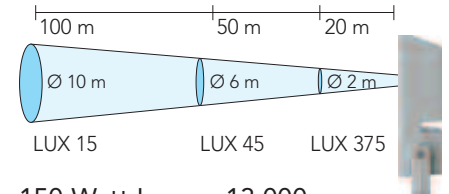

150 Watt Lumen 13.000

Aqua Pro

G12 - 150 W

IP66

CE ▽ □



Movable 90°+90° on bracket with block.



DARK-LIGHT ATTACHMENT (ON REQUEST)


- DIE-CAST ALUMINIUM BODY, FRAME AND BRACKET
- STAINLESS STEEL SCREWS
- POLYESTER POWDER PAINTING CORROSION AND SALINE FOG RESISTANT
- THERMAL-SAFETY SHOCK RESISTANT GLASS
- DOUBLE INSULATION AND AUTOMATIC SWITCH-OFF WHEN OPENING
- 2 X M20 CABLE GLAND
- EN-60598-1 AND EN-60598-2-5 STANDARDS
- SILICONE GASKET
- 4 YEARS WARRANTY
- IK 07 RATING
- WIND SURFACE EXPOSURE 0.12 M2

Colours:

■ TEXTUR

□ MATT WHITE (on request)

■ MATT-BLACK

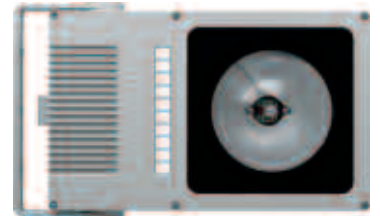


Small areas


Lighting effects

Lighting accents


Weight 6.3 Kg



SPOT 10°




SUPERSPOT 4° (ON REQUEST)

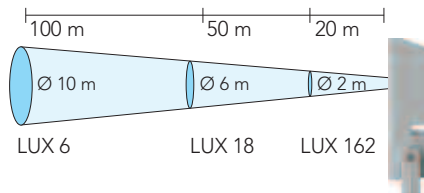

70 Watt Lumen 5800

Eulumdat and photometry available on request

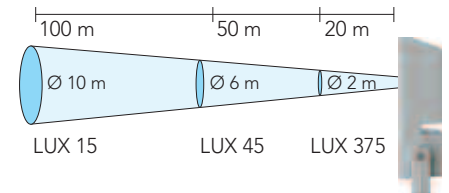

150 Watt Lumen 13.000

Aqua Pro

Rx7s - 70 W

IP66

CE ▽ □



Movable 90°+90° on bracket with block.


- DIE-CAST ALUMINIUM BODY, FRAME AND BRACKET
- STAINLESS STEEL SCREWS
- POLYESTER POWDER PAINTING CORROSION AND SALINE FOG RESISTANT
- THERMAL-SAFETY SHOCK RESISTANT GLASS
- DOUBLE INSULATION AND AUTOMATIC SWITCH-OFF WHEN OPENING
- 2 X M20 CABLE GLAND
- EN-60598-1 AND EN-60598-2-5 STANDARDS
- SILICONE GASKET
- 4 YEARS WARRANTY
- IK 07 RATING
- WIND SURFACE EXPOSURE 0.12 M2

Colours:

■ TEXTUR


□ MATT WHITE (on request)

■ MATT-BLACK

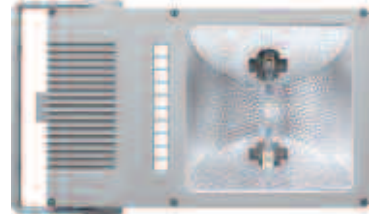


Medium areas
Small buildings
Bridges
Towers


Weight 7.0 Kg



FLOOD

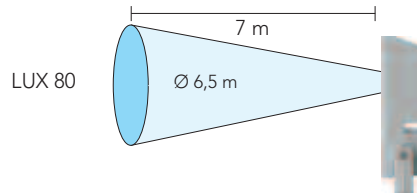

70 Watt Lumen 5800

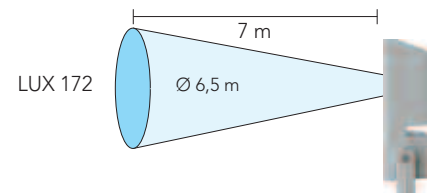

150 Watt Lumen 13.000

Eulumdat and photometry available on request

Aqua Pro

Rx7s - 150 W

IP66

CE ▽ □



Movable 90°+90° on bracket with block.


- DIE-CAST ALUMINIUM BODY, FRAME AND BRACKET
- STAINLESS STEEL SCREWS
- POLYESTER POWDER PAINTING CORROSION AND SALINE FOG RESISTANT
- THERMAL-SAFETY SHOCK RESISTANT GLASS
- DOUBLE INSULATION AND AUTOMATIC SWITCH-OFF WHEN OPENING
- 2 X M20 CABLE GLAND
- EN-60598-1 AND EN-60598-2-5 STANDARDS
- SILICONE GASKET
- 4 YEARS WARRANTY
- IK 07 RATING
- WIND SURFACE EXPOSURE 0.12 M2

Colours:

■ TEXTUR


□ MATT WHITE (on request)

■ MATT-BLACK

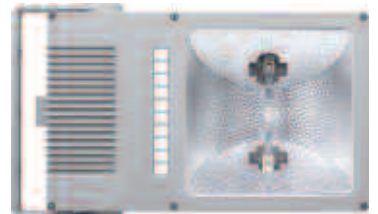


Medium areas
Small buildings
Bridges
Towers


Weight 7.0 Kg



FLOOD

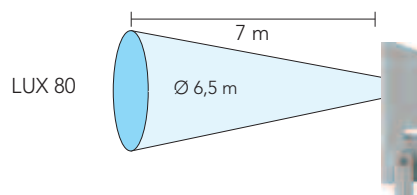

70 Watt Lumen 5800

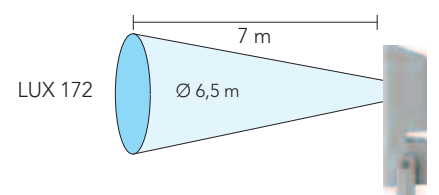

150 Watt Lumen 13.000

Eulumdat and photometry available on request



Aqua Pro

Fc2 - 250 W

IP66



Movable 90°+90°
on bracket with
block.




- DIE-CAST ALUMINIUM BODY, FRAME AND BRACKET
- STAINLESS STEEL SCREWS
- POLYESTER POWDER PAINTING CORROSION AND SALINE FOG RESISTANT
- THERMAL-SAFETY SHOCK RESISTANT GLASS
- DOUBLE INSULATION AND AUTOMATIC SWITCH-OFF WHEN OPENING
- 2 X M20 CABLE GLAND
- EN-60598-1 AND EN-60598-2-5 STANDARDS
- SILICONE GASKET
- 4 YEARS WARRANTY
- IK 07 RATING
- WIND SURFACE EXPOSURE 0.12 M2

Colours:


■ TEXTUR

□ MATT WHITE (on request)


■ MATT-BLACK

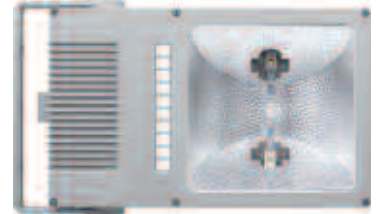

Medium areas
Small buildings
Bridges
Towers
Weight 7.3 Kg



FLOOD

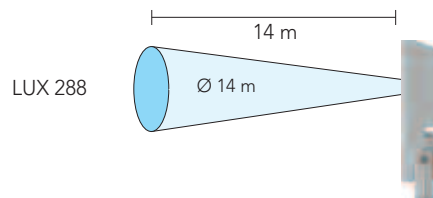

LUX 288

250 Watt Lumen 20.000

Eulumdat and photometry available on request

Aqua Pro

Fc2 - 400 W

IP66



Movable 90°+90°
on bracket with
block.




- DIE-CAST ALUMINIUM BODY, FRAME AND BRACKET
- STAINLESS STEEL SCREWS
- POLYESTER POWDER PAINTING CORROSION AND SALINE FOG RESISTANT
- THERMAL-SAFETY SHOCK RESISTANT GLASS
- DOUBLE INSULATION AND AUTOMATIC SWITCH-OFF WHEN OPENING
- 2 X M20 CABLE GLAND
- EN-60598-1 AND EN-60598-2-5 STANDARDS
- SILICONE GASKET
- 4 YEARS WARRANTY
- IK 07 RATING
- WIND SURFACE EXPOSURE 0.12 M2

Colours:


■ TEXTUR

□ MATT WHITE (on request)


■ MATT-BLACK

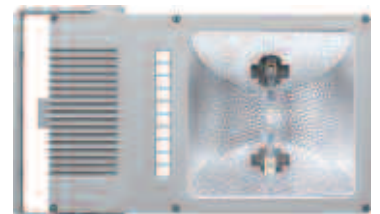

Very large areas
Very large buildings
Sport areas
Weight 7.6 Kg



FLOOD

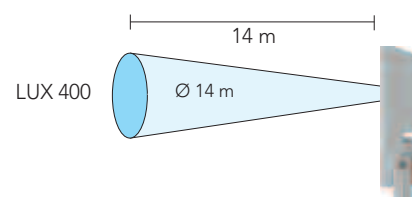

LUX 400

400 Watt Lumen 35.000

Eulumdat and photometry available on request