

the solution



Aquadown Compact

IP 67

"Lighting fixture to be floor-recessed. Die cast aluminium body. The IP 67 protection rating allows for dust-proofing and water-proofing, even during brief immersions. Suitable for fitting in damp surroundings, both indoors and outdoors".




Aquadown Compact "T"

ES 50
(round)




- HALF FROSTED GLASS (Standard)
- MAX 35 W - Q PAR 16 - GU10
- READY TO INSTALL
- STAINLESS STEEL RING
- DIE-CAST ALUMINIUM BODY
- IP67
- FIX
- COMPLETELY FROSTED GLASS (on request)


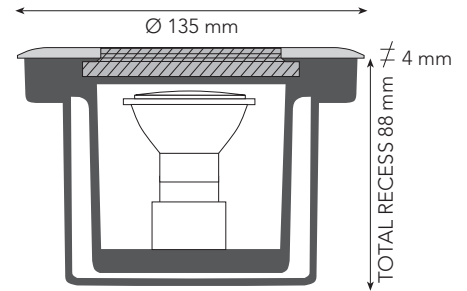


Aquadown Compact "Q"

ES 50
(square)



- HALF FROSTED GLASS (Standard)
- MAX 35 W - Q PAR 16 - GU10
- READY TO INSTALL
- STAINLESS STEEL RING
- DIE-CAST ALUMINIUM BODY
- IP67
- FIX
- COMPLETELY FROSTED GLASS (on request)

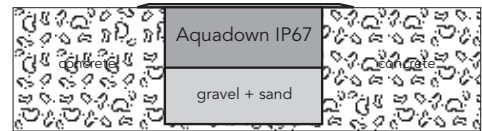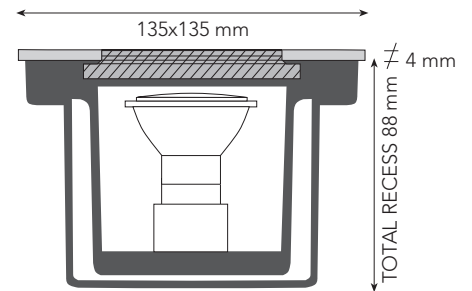

when installing Aquadown, a "drainage bed" of at least 20 centimeters has to be observed under the recessing box (gravel and sand)



Plastic box always included



Total recess **only 88 mm**

Fixture only without plastic case