



Aquadown *medio*

"Lighting fixture to be floor-recessed.
Die cast aluminium body.
Light beam to be oriented at will (only
AR111 version).
The IP 67 protection rating allows for
dust-proofing and water-proofing,
even during brief immersions.
Suitable for fitting in damp surroundings,
both indoors and outdoors".



**Aquadown
medio**
fluo 10 "T"
(round)





- INTEGRATED BALLAST
- FLUORESCENT 10 WATT G 24 d-1
- STAINLESS STEEL RING
- DIE-CAST ALUMINIUM BODY
- COMPLETELY FROSTED GLASS (Standard)
- IP 67
- FIX



• DULUX-D


**Aquadown
medio**
fluo 10 "Q"
(square)

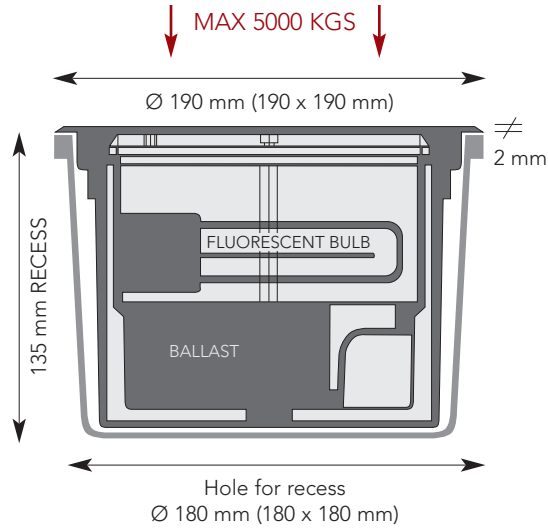

**Aquadown
medio**
AR111 "T"
(round)



- INTEGRATED TRANSFORMER
- HALOGEN AR111 50 W
- STAINLESS STEEL RING
- DIE-CAST ALUMINIUM BODY
- HALF FROSTED GLASS (Standard)
- IP 67
- MOVABLE



**Aquadown
medio**
AR111 "Q"
(square)

