




Aquadown *mini*

"Lighting fixture to be floor-recessed. The IP 67 protection rating allows for dust-proofing and water-proofing, even during brief immersions. Suitable for fitting in damp surroundings, both indoors and outdoors".

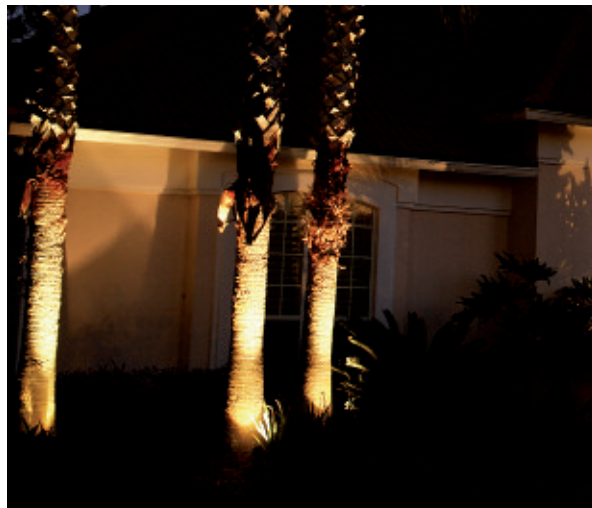

Aquadown mini "T"


ES 50
(round)



- HALF FROSTED GLASS (Standard)
- GU10 - 230 V - Q PAR 16
- MAX 35 W
- READY TO INSTALL
- STAINLESS STEEL RING
- DIE-CAST ALUMINIUM BODY
- IP67
- FIX
- COMPLETELY FROSTED GLASS (on request)


Aquadown mini "Q"

ES 50
(square)



Aquadown mini "T"

MR 16
(round)



- HALF FROSTED GLASS (Standard)
- MR 16 - 12 V - GU 5,3
- MAX 35 W
- TRANSFORMER REQUIRED
- DIE-CAST ALUMINIUM BODY
- IP67
- MOVABLE
- COMPLETELY FROSTED GLASS (on request)

Aquadown mini "Q"

MR 16
(square)

