



Aquatech

"Lighting fixture to be floor-recessed.
Die cast aluminium body.
The IP 67 protection rating allows for
dust-proofing and water-proofing,
even during brief immersions.
Suitable for fitting in damp surroundings,
both indoors and outdoors".



Aquatech


"A" 70 watt

"A" 150 watt

(Asymmetric)



- HIT-DE Rx7s
- 230 V
- 70 or 150 W
- GLASS TEMPERATURE 85°C
- DIE-CAST ALUMINIUM BODY
- DIE-CAST ALUMINIUM CASE
- IP 67
- **DOUBLE GLASS**



		LUX				
H meters		0	45	16	4	1
0.5		60	26	3	1	
1		70	38	14	1	
1.5		90	28	10	6	
5		80	30	7	4	
6		76	31	5	3	
8		64	28	5	2	
8		50	27	6	2	
20		44	25	6	2	
16		26	16	4	2	
14		21	14	4	2	
12		16	12	3	2	

Photometric data measured when luminaires are positioned at 1 m far from the wall



Aquatech


"S" 70 watt

"S" 150 watt



(Symmetric)



- HIT-DE Rx7s
- 230 V
- 70 or 150 W
- GLASS TEMPERATURE 85°C
- DIE-CAST ALUMINIUM BODY
- DIE-CAST ALUMINIUM CASE
- IP 67
- **DOUBLE GLASS**



		LUX				
H meters		0	45	16	4	1
0.5		54	21	3	1	
1		63	38	14	1	
1.5		85	21	10	6	
2		72	24	7	4	
2.5		71	25	5	3	
3		58	23	5	2	
3.5		45	20	6	2	
4		38	19	6	2	
6		19	11	4	2	
7		15	8	4	2	
8		10	6	3	2	

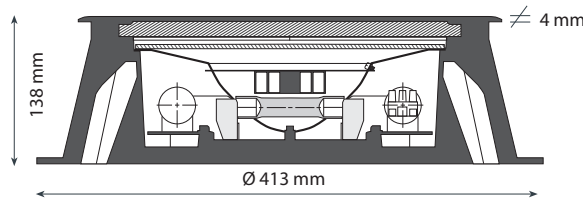

MAX 10.000 KGS
TÜV TESTED

