

F.I.R.E.

energy saving

Recessed spotlights for compact fluorescent lamps. Made of self-extinguishing polycarbonate (class V-0).

Quick fixing system in the false ceiling. its design, with a very low profiles, make it suitable to be fitted in false ceilings with a limited space.

The main characteristics of these new spotlights are:

- high luminous capacity
- very small size.

This product line is also provided with a dark-light filter, and antidazzling prismatic filter.





F.I.R.E.



- **ELECTROMAGNETIC**
- LAMP BASE G24d-1
- 1 x 10-13 WATT - TC-D
- IP 43 ONLY WITH PRISMATIC ATTACHMENT



- **ELECTRONIC**
- LAMP BASE G24q-1
- 1 x 10-13 WATT
- IP 43 ONLY WITH PRISMATIC ATTACHMENT

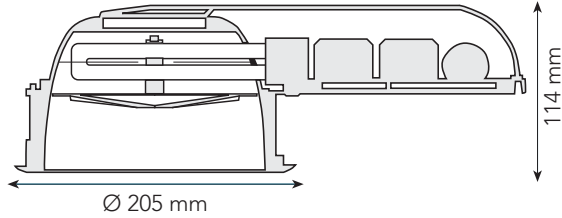

Max thickness of false ceiling: 30 mm
 Black polycarbonate (UL94 V-0)

Applications: suitable for installation in normally inflammable surfaces.



F.I.R.E.



- **ELECTROMAGNETIC**
- LAMP BASE G24d-2
- 1 x 18 WATT - TC-D
- IP 43 ONLY WITH PRISMATIC ATTACHMENT



- **ELECTRONIC**
- LAMP BASE G24q-2
- 1 x 18 WATT
- IP 43 ONLY WITH PRISMATIC ATTACHMENT

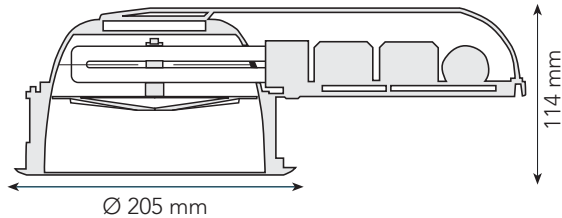

Input supply 230 V ± 10% 50 Hz. (240 V or 110 V on request).

Ballast: integrate magnetic.

Electrical protection: class 2 double insulated

Type of lamp: fluorescent compact G24.


F.I.R.E.




- **ELECTROMAGNETIC**
- LAMP BASE G24d-1
- 2 x 13 WATT - TC-D
- IP 43 ONLY WITH PRISMATIC ATTACHMENT



- **ELECTRONIC**
- LAMP BASE G24q-1
- 2 x 13 WATT
- IP 43 ONLY WITH PRISMATIC ATTACHMENT



185 mm

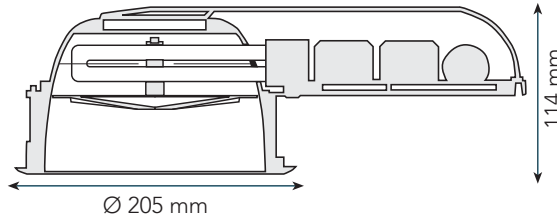

Max thickness of false ceiling: 30 mm

Black polycarbonate (UL94 V-0)

Applications: suitable for installation in normally inflammable surfaces.


F.I.R.E.




- **ELECTROMAGNETIC**
- LAMP BASE G24d-2
- 2 x 18 WATT - TC-D
- IP 43 ONLY WITH PRISMATIC ATTACHMENT



- **ELECTRONIC**
- LAMP BASE G24q-2
- 2 x 18 WATT
- IP 43 ONLY WITH PRISMATIC ATTACHMENT



185 mm

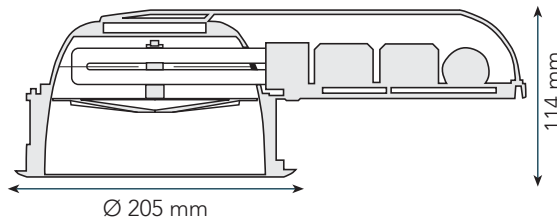


F.I.R.E.




- **ELECTROMAGNETIC**
- LAMP BASE G24d-3
- 2 x 26 WATT - TC-D
- IP 43 ONLY WITH PRISMATIC ATTACHMENT



- **ELECTRONIC**
- LAMP BASE G24q-3
- 2 x 26 WATT
- IP 43 ONLY WITH PRISMATIC ATTACHMENT



185 mm

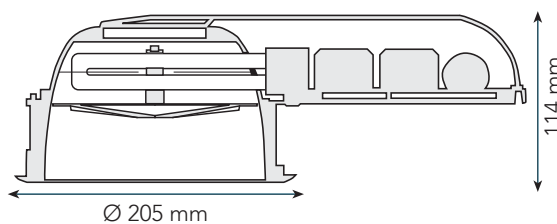

F.I.R.E

REFLECTOR OPTIONS



Silver polycarbonate reflector
(Standard)




White polycarbonate reflector
(Optional)




Gold polycarbonate reflector
(Optional)

F.I.R.E

PRISMATIC DIFFUSER

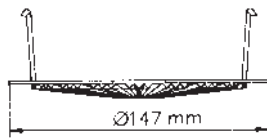

Prismatic attachment
(Optional)



Darklight diffuser
(Optional)